


BS / DIN Standard Roller Chain

표준형 로울러 체인[II] : 유럽규격

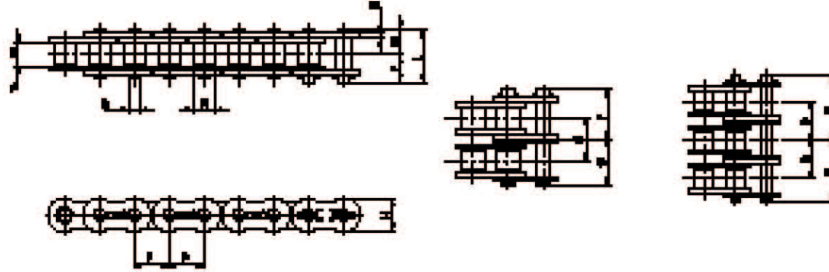

unit : mm

DONG BO Chain No.		Pitch	Inner Width	Roller Dia	Plate				Pin		Transverse pitch	Min. Breaking Load
Standard Designation	BS CHAIN No.				P	W min	R max	T1	T2	H max		
DBC	06B-1	9.525	5.72	6.35	1.00	1.30	8.26	8.26	3.28	13.5	10.24	910
	06B-2									23.8		1,730
	06B-3									34.0		2,540
DBC	08B-1	12.70	7.75	8.51	1.50	1.50	11.81	10.92	4.45	17.0	13.92	1,820
	08B-2									31.0		3,180
	08B-3									44.9		4,540
DBC	10B-1	15.875	9.65	10.16	1.50	1.50	14.73	13.72	5.08	19.6	16.59	2,270
	10B-2									36.2		4,540
	10B-3									52.8		6,810
DBC	12B-1	19.05	11.68	12.07	1.70	1.80	16.13	16.13	5.72	22.7	19.46	2,950
	12B-2									42.2		5,900
	12B-3									61.7		8,850
DBC	16B-1	25.40	17.02	15.88	3.20	4.0	21.08	21.08	8.28	36.1	31.88	6,130
	16B-2									68.0		10,820
	16B-3									99.9		16,330
DBC	20B-1	31.75	19.56	19.05	3.50	4.50	26.42	26.42	10.19	43.2	36.45	9,700
	20B-2									79.7		17,350
	20B-3									116.1		25,510
DBC	24B-1	38.10	25.40	25.40	5.20	6.0	33.40	33.40	14.63	53.4	48.36	16,330
	24B-2									101.8		28,580
	24B-3									150.0		43,370
DBC	28B-1	44.45	30.99	27.94	6.30	7.50	37.08	37.08	15.90	65.1	59.56	20,410
	28B-2									124.7		36,740
	28B-3									184.3		54,080
DBC	32B-1	50.80	30.99	29.21	6.30	7.0	42.29	42.29	17.81	67.4	58.55	25,510
	32B-2									126.0		45,920
	32B-3									184.5		68,370
DBC	40B-1	63.50	38.10	39.37	8.0	9.5	52.96	52.96	22.89	78.20	72.29	36,220
	40B-2									151.20		64,300
	40B-3									223.90		96,940
DBC	48B-1	76.20	45.72	48.26	10.0	12.0	63.88	63.88	29.24	98.70	91.21	57,140
	48B-2									190.00		103,040
	48B-3									281.60		228,570
DBC	56B-1	88.90	53.34	53.98	12.0	14.0	77.85	77.85	34.32	114.50	106.60	86,730
	56B-2									221.10		163,270
DBC	64B-1	101.60	60.96	63.50	14.0	16.0	90.17	90.17	39.40	126.80	119.89	114,290
	64B-2									247.00		204,080
DBC	72B-1	114.30	68.58	72.39	16.0	17.0	103.60	103.60	44.48	144.40	136.27	142,860